


Unit: mm



SECTION A-A

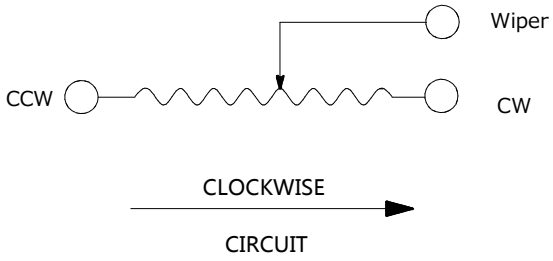

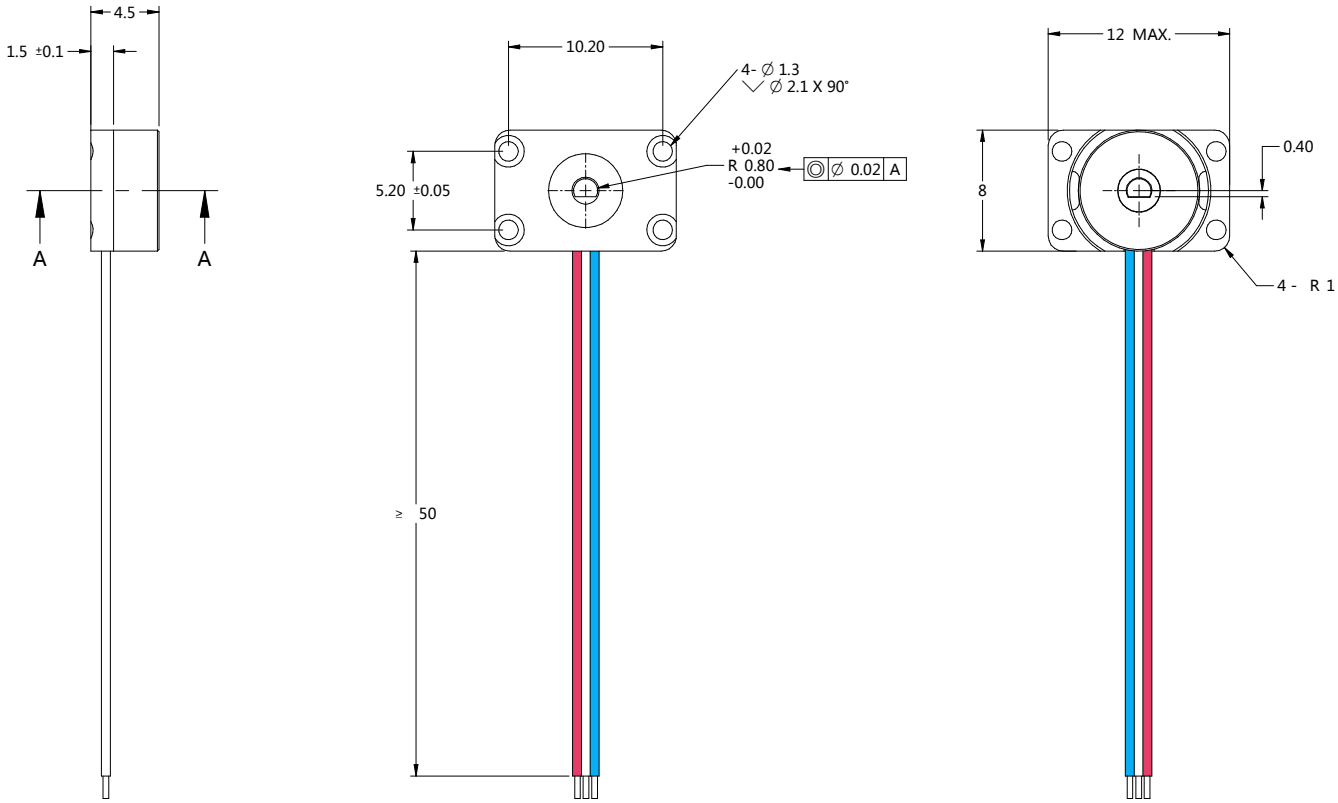

NOTE: Housing surface: black anodised.

PART SPECIFICATIONS:

1. RESISTANCE: 5K±10%	6. Rotary Torque: 15g.cm Max
2. POWER RATING: 0.2Watt@70 °C	7. High-pot: 300VAC@ 1minutes
3. Linearity: ±0.5%	8. Operating Tem.: -55 °C~125 °C
4. TCR: ±300ppm	9. ROTATIONAL LIFE: 1,000K CYCLES
5. Insulation Resistance: ≥500MΩ @100VDC	10.Noise: 100mV
11. LEHO/HEHO RESIDUAL RESISTANCE: 80 ohms Max.	
12. ROTATION ANGLE: MECHANICAL: 360°; ELECTRICAL: 80°±2°	

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: HRS08S001	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	SIZE **A4**	SCALE:	DRAWN BY:	CHECKED BY:
PART SERIES: HRS08		REV -	2X	APPROVED BY:	ISSUED DATE :