



Unit: mm

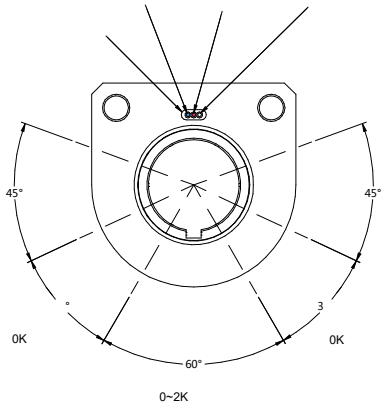

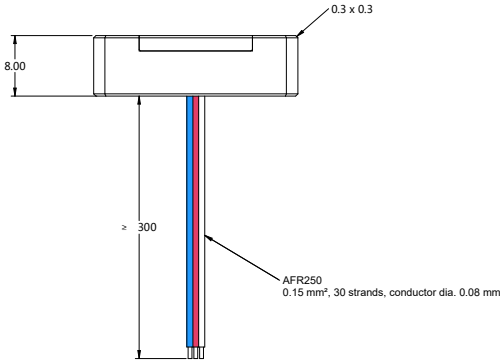

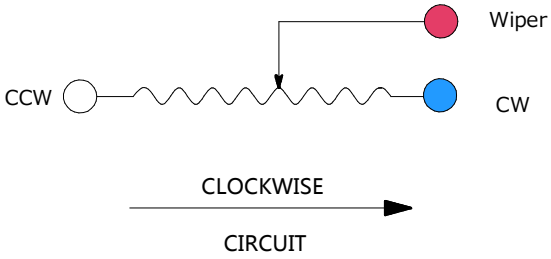

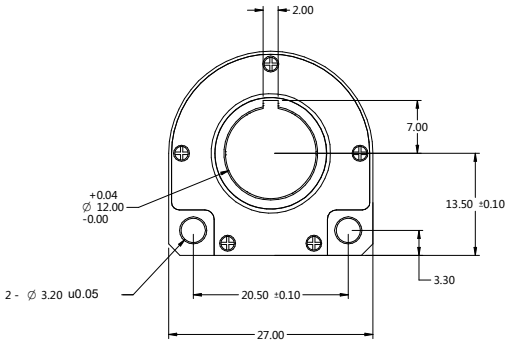

:,

PART SPECIFICATIONS:

1. RESISTANCE: 2KΩ±5%	6. Rotary Torque: 30g.cm Max
2. POWER RATING: 0.25Watt@40 °C	7. High-pot: 500V@ 1minutes
3. Linearity: ±1.0%	8. Operating Tem.: -45 °C~105 °C
4. NOISE: 200mv Max.	9. ROTATIONAL LIFE: 1,000K CYCLES
5. TCR: ±400ppm	10. Insulation Resistance: 50MΩ@500V

11. LEHO/HEHO RESIDUAL RESISTANCE: 30 ohms Max.

12. ROTATION ANGLE: MECHANICAL: 220°; ELECTRICAL: 60°±2°

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: HRS27S001	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	SIZE **A4**	SCALE:	DRAWN BY:	CHECKED BY:
PART SERIES: HRS27		REV A	2X	APPROVED BY:	ISSUED DATE :