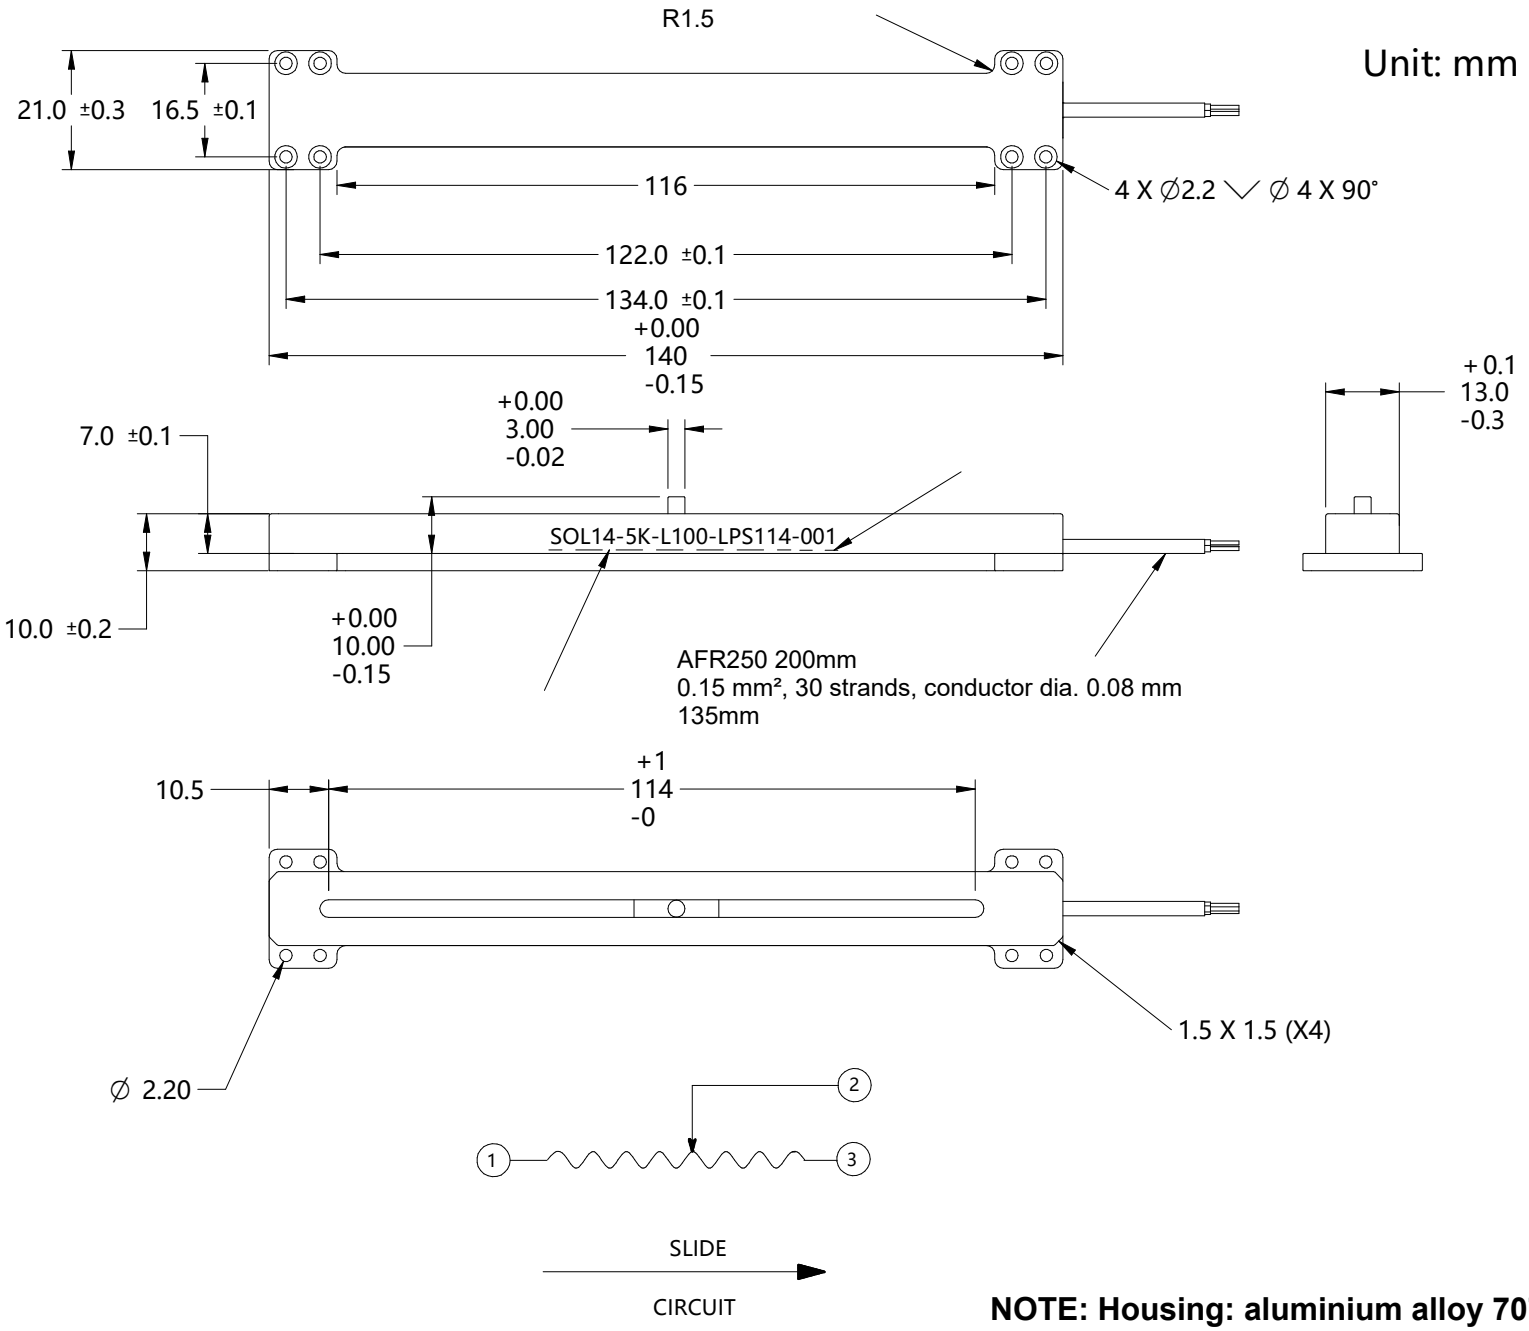


NOTE: Housing: aluminium alloy 7075

PART SPECIFICATIONS:

1. RESISTANCE: 5K±10%	6. Slide Torque: 80g Max
2. POWER RATING: 0.25Watt@40 °C	7. High-pot: 500V@ 1minutes
3. Linearity: ±0.5%	8. Operating Tem.: -45 °C~125 °C
4. NOISE: 200mv Max.	9. ROTATIONAL LIFE: 1,000K CYCLES
5. TCR: ±400ppm	10. SPEC: Ref. LPS-SPEC-001
11. LEHO/HEHO RESIDUAL RESISTANCE: 30 ohms Max.	
12. SLIDE TRAVEL: MECHANICAL: 114mm±0.5mm; ELECTRICAL: 110mm±1mm	

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: LPS114	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	SIZE **A4**	SCALE: 0.75X	DRAWN BY:	CHECKED BY:
PART SERIES:		REV A		APPROVED BY:	ISSUED DATE: