
Unit: mm

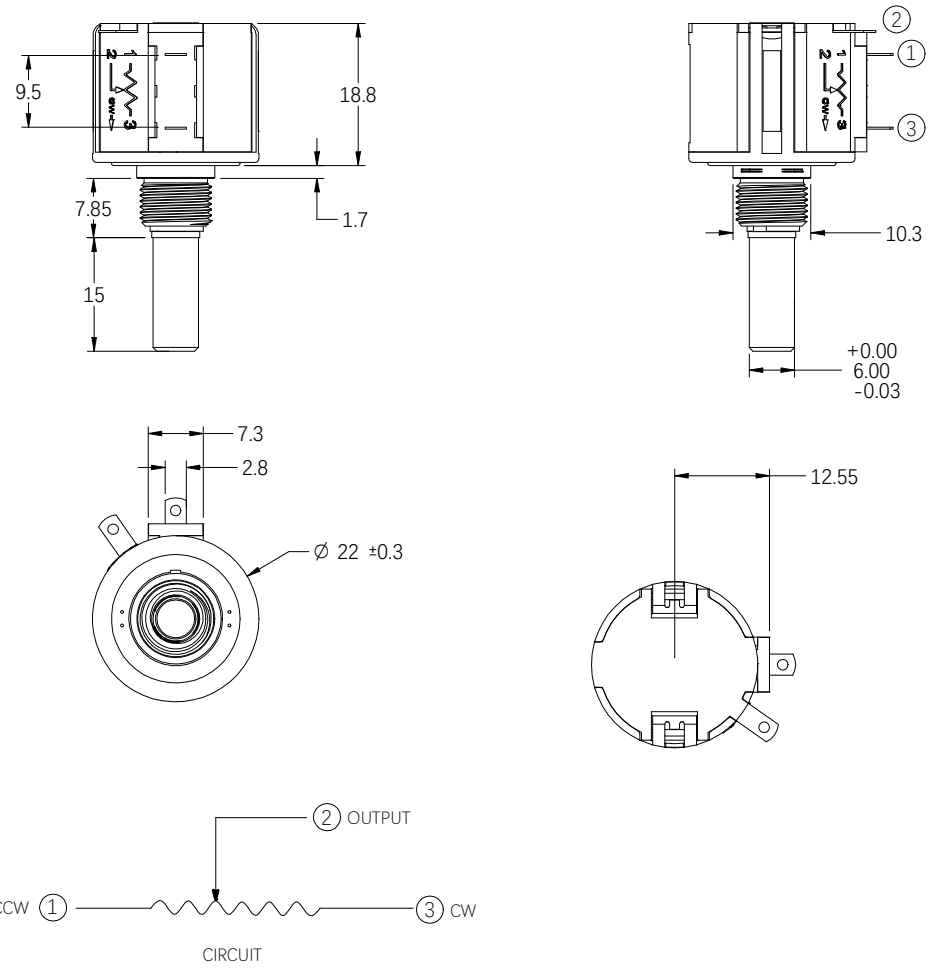

PART SPECIFICATIONS:

1. RESISTANCE: 500K±10%	6. IP RATING: IP50
2. POWER RATING: 2 Watt@70 °C	7. HIGH-POT: 1000V@ 1minutes
3. LINEARITY: ±0.3%	8. OPERRATING TEMP.: -40 °C~105 °C
4. NOISE: 200mv Max.	9. ROTATIONAL LIFE CYCLES: 500K Cycles
5. HARDWARE: Nut&Washer(SUS303 Nut &SUS304 Washer)	10. Turns: 10 turns
11. LEHO/HEHO RESIDUAL RESISTANCE: 50 ohms Max.	

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: PD2310-500K	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	SIZE **A4**	SCALE:	DRAWN BY:	CHECKED BY:
PART SERIES: PD23		REV –	1 X	APPROVED BY:	ISSUED DATE: