


Unit: mm

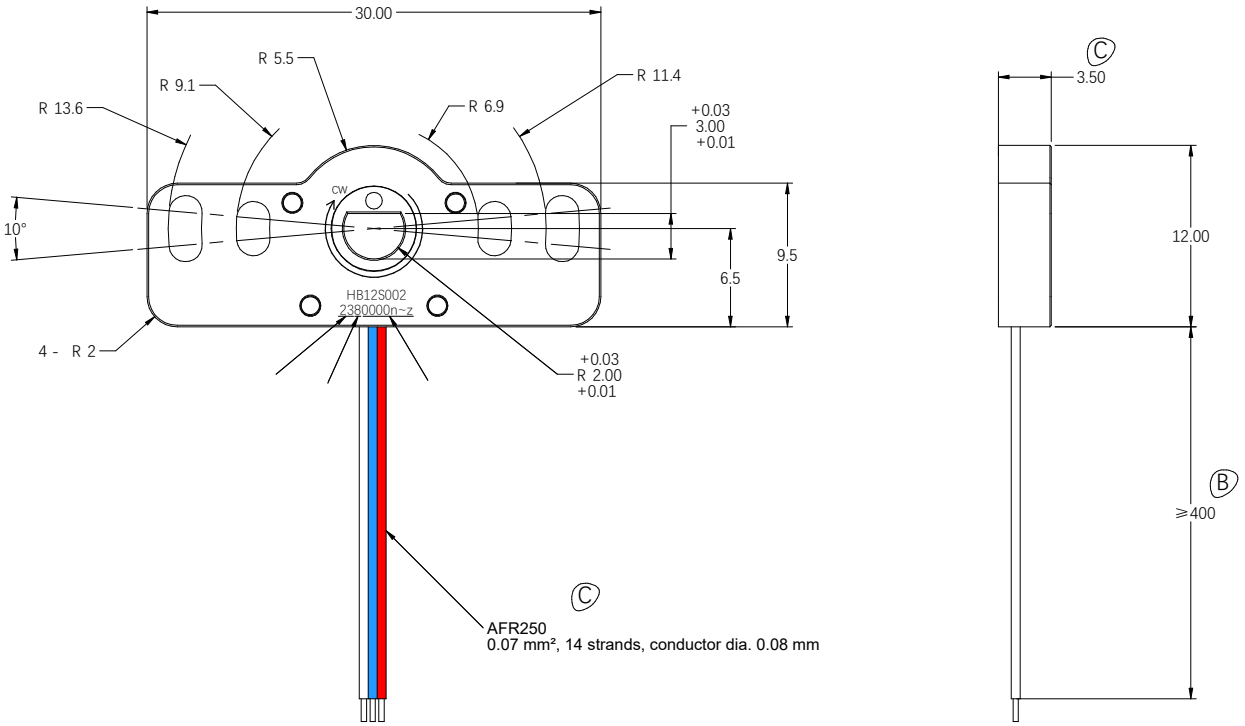

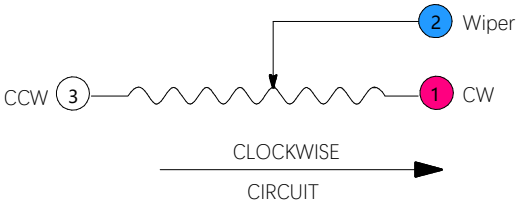



NOTE: 1. Housing: aluminium alloy 7075, black anodised.
2. Blue wire = output; white wire = CCW end; red wire = CW end.
3. Install with the marking facing outward.

PART SPECIFICATIONS:	
1. RESISTANCE: 5K±10%	6. Rotary Torque: 30g.cm Max
2. POWER RATING: 0.25Watt@70 °C	7. High-pot: 500VAC@ 1minutes
3. Linearity: 1%	8. Operating Tem.: -45 °C~105 °C
4. TCR: ±300ppm	9. ROTATIONAL LIFE: 2,000K CYCLES
5. Insulation Resistance: ≥500MΩ @100VDC	10.Noise: 300mV
11. LEHO/HEHO RESIDUAL RESISTANCE: 100 ohms Max.	
12. ROTATION ANGLE: MECHANICAL: 360°; ELECTRICAL: 60°±5°	

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: SRS12S009	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	SIZE A4	SCALE:	DRAWN BY:	CHECKED BY:
PART SERIES: SRS12		REV C	2X	APPROVED BY:	ISSUED DATE: