


Unit: mm

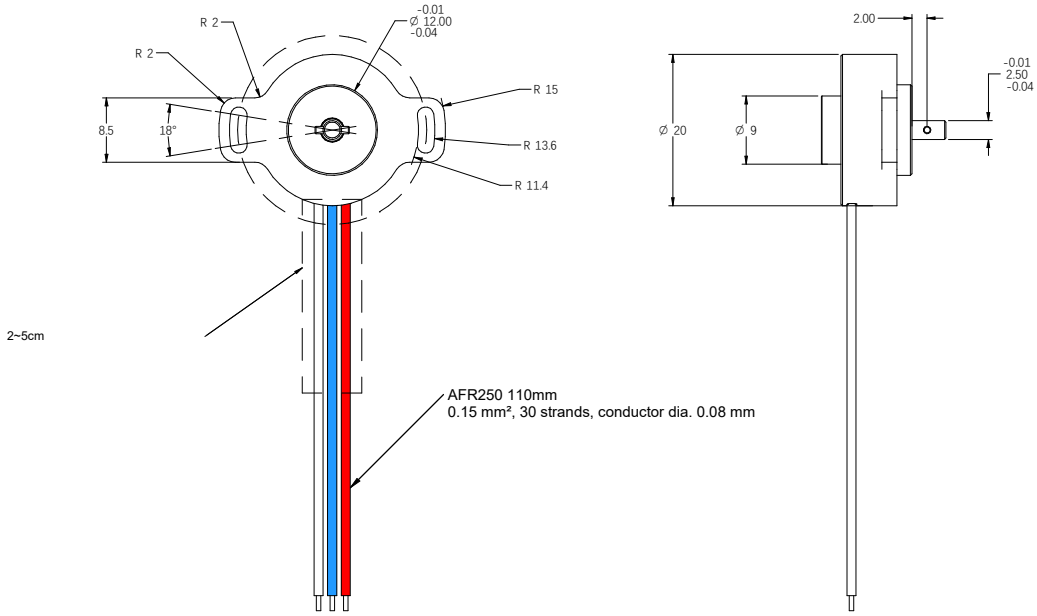



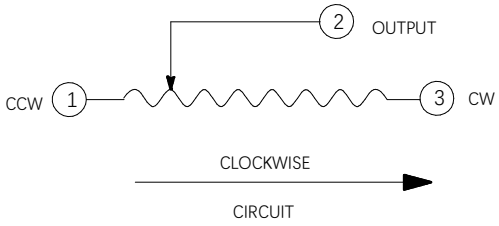

NOTE: 1. Housing: aluminium alloy 7075, silver anodised.
2. Red wire = output; white wire = CCW end; blue wire = CW end.

PART SPECIFICATIONS:	
1. RESISTANCE: 2.4K±10%	5. ROTARY TORQUE: 30g.cm Max.
2. POWER RATING: 0.5Watt@70 °C	6. TCR: ±300ppm/ °C
3. Linearity: ±0.25%	7. High-pot: 750V@ 1minutes
4. ROTATIONAL LIFE: 5,000K CYCLES	8. Operating Tem.: -55 °C~85 °C
9. RESIDUAL RESISTANCE: 20 ohms Max.	10. Operating Tem.: 1000MΩ
11. ROTATION ANGLE: MECHANICAL: 360°; ELECTRICAL: 120°±5°	

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: SRS20S004	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	SIZE **A4**	SCALE:	DRAWN BY:	CHECKED BY:
PART SERIES: SRS20		REV A	1.5X	APPROVED BY:	ISSUED DATE: