




Unit: mm

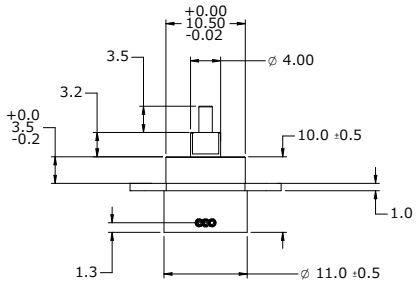



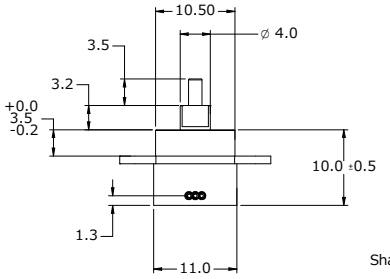

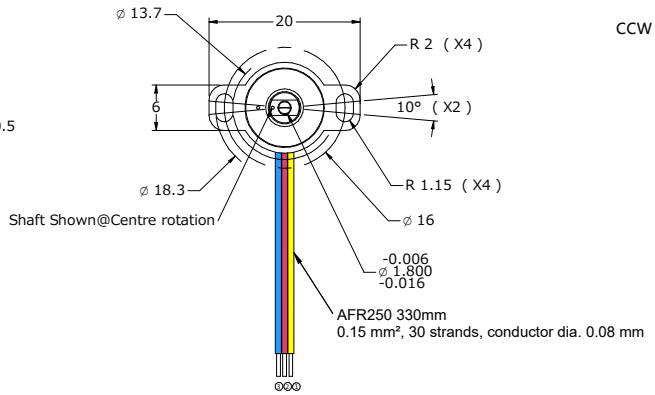

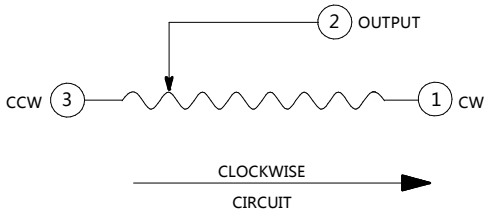

NOTE: 1. Industrial joystick grade, high return-to-centre voltage requiremen
2. Housing: aluminium alloy 7075, black anodised.
3.,,

PART SPECIFICATIONS:

1. RESISTANCE: 4.7KΩ ±10%	6. TCR: ±500ppm/ °C
2. POWER RATING: 0.25Watt@70 °C	7. High-pot: 500V@ 1minutes
3. Linearity: ±1%	8. Operating Tem.: -45 °C~105 °C
4. NOISE: 200mv Max.	9. ROTATIONAL LIFE: 1,000K CYCLES
5. ROTARY TORQUE: 30g.cm Max.	10. SPEC: Ref. SRS11-SPEC-003
11. LEHO/HEHO RESIDUAL RESISTANCE: 20 ohms Max.	
12. ROTATION ANGLE: MECHANICAL: 360°; ELECTRICAL: 120°±2°	

cooka	**COOKA (ZHONGSHAN) TECHNOLOGY CO., LTD**			CUSTOMER:	
PART NAME: SRS11S003	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	SIZE **A4**	SCALE:	DRAWN BY:	CHECKED BY:
PART SERIES:	ANGLES ±3° 0PL 0.5; 1 PL ±0.2; 2 PL ±0.1	REV A	1.0X	APPROVED BY:	ISSUED DATE :